

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




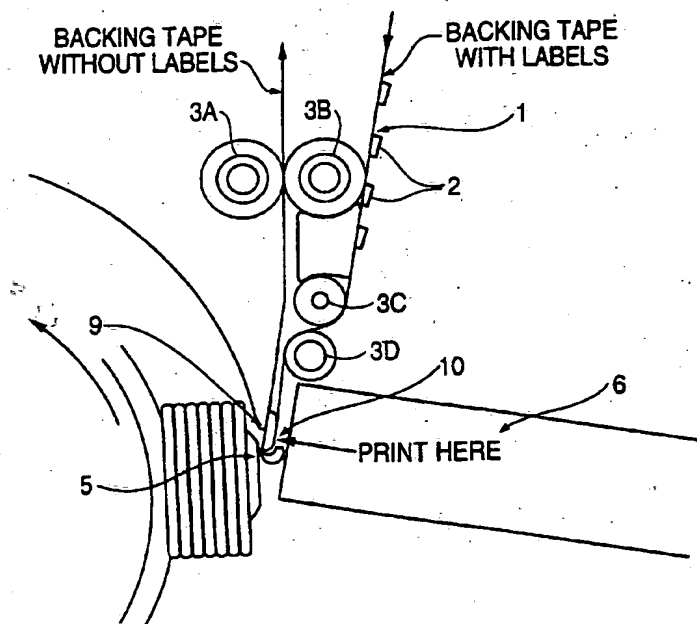
INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B65C 9/18, 3/00, 9/46		A1	(11) International Publication Number: WO 99/46170
		(43) International Publication Date: 16 September 1999 (16.09.99)	
(21) International Application Number: PCT/US99/05142		(74) Agents: McNAMARA, Brian, J. et al.; Foley & Lardner, Suite 500, 3000 K Street, N.W., Washington, DC 20007-5109 (US).	
(22) International Filing Date: 10 March 1999 (10.03.99)			
(30) Priority Data: 60/077,441 10 March 1998 (10.03.98) US 09/252,829 19 February 1999 (19.02.99) US		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SI, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Applications US 09/252,829 (CIP) Filed on 19 February 1999 (19.02.99) US 60/077,441 (CIP) Filed on 10 March 1998 (10.03.98)			
(71) Applicant (for all designated States except US): AGRI-TECH, INC. [US/US]; 273 Lakeview Drive, Woodstock, VA 22664 (US).		Published With international search report.	
(72) Inventor; and (75) Inventor/Applicant (for US only): WEISBECK, Richard [CA/CA]; T-134 Ent., 2243A Leckie Road, Kelowna, British Columbia V1X 6Y5 (CA).			

(54) Title: HIGH SPEED PRODUCE LABEL APPLICATOR

(57) Abstract

A labeler for objects, such as fruit or vegetables, has a pickup head that includes a firing piston, and a larger piston that is coupled to the firing piston. The pickup head, along with other pickup heads, are provided on an assembly that rotates the heads in a circular manner. When each pickup head is at the 6 o'clock position, a burst of air pressure is provided to the firing piston, thereby causing it to fire and to cause the larger piston to move in an outward direction. This causes the pickup head to extend fully, to thereby cause a label positioned on an applicator at a distal end of the pickup head to contact an object and thereby apply the label to the object. At other positions besides the 6 o'clock position, a vacuum source provides a vacuum to the pickup heads, thereby maintaining the pickup heads in a fully retracted position, as well as providing a way for keeping the label on the applicator of the pickup head while the pickup head is rotating.



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AI	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NK	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

HIGH SPEED PRODUCE LABEL APPLICATOR**BACKGROUND OF THE INVENTION****1. Field of the Invention**

The present invention relates to a method and apparatus for printing adhesive labels
5 with information specific to the produce item to be labeled and applying the labels to that
produce item by a vacuum/air burst system.

2. Description of the Related Art

A variety of labelling and object sorting apparatus and methods have been disclosed.

10 The following documents are hereby incorporated by reference:

1. Patent application, entitled "Object Sorter and Sizer," applicant Roger Blood,
filed on February 20, 1998, Patent Application Serial # 09/027,489.

2. U.S. Patent No. 4,194,941.
3. U.S. Patent No. 4,189,337
- 15 4. U.S. Patent No. 5,441,586
5. U.S. Patent No. 5,489,360
6. U.S. Patent No. 5,645,680
7. U.S. Patent No. 5,387,302
8. U.S. Patent No. 4,328,063
- 20 9. U.S. Patent No. 4,547,001
10. U.S. Patent No. 5,660,676
11. U.S. Patent No. 4,174,057
12. U.S. Patent No. 2,848,228
13. U.S. Patent No. 3,888,725
- 25 14. U.S. Patent No. 4,526,648
15. U.S. Patent No. 4,707,211
16. U.S. Patent No. 4,784,714
17. U.S. Patent No. 4,919,747
18. U.S. Patent No. 4,978,416
- 30 19. European Patent Application No. EP 0 113 256 A2

Generally, in a conventional produce labeller, pre-printed labels are used requiring one to order in advance labels for different varieties of produce, such as fruits and vegetables. There are as many as 60 or 70 varieties of some fruits. The labels must be printed before the produce season begins each year. Quantities of labels to be printed are based on a rough estimate of the type of produce that would be available in that given year. However, the necessary quantities of pre-printed labels for each variety of produce are difficult to predict. Thus, for example, one must guess how many large red delicious apple labels or how many small red delicious apple labels would be needed. Conventional produce labellers require ordering and buying these pre-printed labels whether or not they are eventually used. One must also estimate minimum quantities of pre-printed labels which might be required. Often these estimates are inaccurate resulting in a waste of the labels. Further label waste results from the practice of ordering more labels than the anticipated requirement in order to avoid label shortages if additional fruit requires packing.

SUMMARY OF THE INVENTION

The present invention is a label applicator, which includes a label carrier reel containing a plurality of unprinted labels. The label applicator also includes a print station including a printer, positioned to print a desired image on said unprinted labels to provide printed labels. The label applicator further includes a pickup head for picking up the printed labels from said print station at a label transfer position, rotationally carrying said printed labels from said label transfer position to a label deposit position, and successively placing the printed labels on individual objects.

According to the invention, blank labels on a backing tape are supplied to a printer. Even before the printer completes printing information on a blank label, a pickup head at a label transfer position begins to remove the label from the backing tape. A vacuum is applied through the pickup head to remove and hold the printed label onto an applicator at the end of the pickup head. The pickup head, which is mounted on a rotating plate, remains in a retracted position until it rotates from the label transfer position to a label deposit position. At the label deposit position, pressure, such as air pressure is applied to drive a firing piston to apply force to a main piston. Momentum of the main piston drives the applicator with the label toward the object to be labelled. After the pickup head rotates away from the label deposit position, the vacuum retracts the pickup head and applicator.

The system can be controlled to prevent the pickup head from advancing at the label deposit position, for example when no object is present. Alternatively, the labelling apparatus construction can be simplified by allowing the pickup head to advance each time it passes the label deposit position. In order to avoid wasting labels, using the same control system that informs the printer what information to print, the printer can also advise the printer when no object requiring a label is present. The printer will then cease printing and advancing the label tape until another label is needed. As a result, the labelling apparatus can have a conveniently simplified mechanical construction in which the pickup head always advances at the label deposit position, because it does not have a label on the applicator where no label is required but does have a label on the applicator when an object requires labelling.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will become more fully apparent from the following detailed description when read in conjunction with the accompanying drawings, with like reference numerals indicating corresponding parts throughout, and wherein:

Figure 1 shows a label applicator according to a first embodiment of the invention;

Figure 2 shows a label applicator and a conveyor providing objects to be labeled, according to the first embodiment of the invention;

Figure 3 shows details of a label according to the invention;

Figure 4 shows details of air provided during a label printing according to the invention;

Figure 5 shows details of a label applied to a pickup head during a printing operation, according to the invention;

Figure 6A shows a backer tape that holds labels, according to the invention;

Figure 6B shows features of backup tape advance synchronizing, according to the invention;

Figure 7 shows details of a pickup head according to a third embodiment of the invention;

Figure 8A shows a label held by vacuum onto a pickup head according to the third embodiment of the invention;

Figure 8B shows air pressure supply elements and a vacuum supply elements according to the third embodiment of the invention;

Figure 9 shows a pickup head in a partially extended position, according to the third embodiment of the invention;

5 Figure 10 shows a pickup head in a fully extended position, according to the third embodiment of the invention;

Figure 11 shows a pickup head in a fully retracted position, soon after applying a label to an object, according to the third embodiment of the invention;

10 Figure 12 shows in block diagram form elements making up a label applicator according to the invention;

Figure 13A shows a side view of a sponge applicator according to an alternative embodiment of the invention; and

Figure 13B shows a head-on view of the sponge applicator of Figure 13A.

15 **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

The present invention provides an apparatus in which the labels are not pre-printed but rather are printed and then applied to the produce in real time.

20 Figure 1-6B illustrate the high speed produce labeller according to a first embodiment of the present invention. The third embodiment, to be described later, utilizes all of the features shown in the first embodiment, but with a differently configured pickup head.

As shown in Figures 1 and 2, a silicone-coated backer tape (1) to which the labels (2) are affixed is fed from a feed roller (3) to an applicator head (4) having one or more pickup heads (5). The applicator head (4) is shown as a rotary applicator head. Those of
25 ordinary skill will recognize that other applicator head configurations, such as a reciprocating applicator head which moves back and forth, could also be used. Five pickup heads (5) are shown in Figs. 1 and 2, although any number of such pickup heads may be used. A printer (6), for example, an ink jet printer, is located between the feed roller (3) and the applicator head (4). As each label (2) on the backer tape (1) approaches one of the
30 pickup heads (5), it comes off the tape (1) and held on the pickup head (5) by suction. Once the pickup head (5) has rotated to a label deposit position, for example, approximately the

six o'clock position, a vigorous burst of positive air pressure is applied to that pickup head. The label (2) is projected off the pickup head (5) through the air, adhesive side down, onto an item of produce (7) or other object passing by means of a conveyor (8) beneath the apparatus.

5 An encoder coordinates the movement of the feed roller and the applicator head. The conveyor (8) is typically a series of transversely disposed rollers or alternatively has evenly spaced cups for receiving each produce item (7) and locating it in a predetermined position as it passes beneath the applicator head (4). Prior to passing beneath the applicator head (4), each produce item (7) passes a classifier which senses its presence on the conveyor
10 and also senses one or more classifying parameters, such as weight and color content of the item, and classifies it accordingly. As discussed further herein, Fig. 12 illustrates such a system. The information pertaining to the sensed classification is transmitted to the printer (6) via a computer or other processor. A label (2) is printed with information that corresponds to the classification of the item and the label (2) is applied to the object (7).

15 Referring to Figure 2, the labels are sticky backed and mounted on a continuous, silicone coated backer. The tape roll (1) is fed by a series of synchronized feed rollers (3) and passes by a print head of the printer (6). The label (2) is printed with ink while it is moving through the turn bar assembly (10). The labels (2) are fed in a "start/stop" motion, and are plucked from the tape backer (10) by one of the pickup heads (5). The label (2) is
20 held by suction through a grid of small holes (9) in the distal portion of the pick-up head (5). The rotary applicator head (4) rotates and when it is positioned over the produce item, the pick-up head (5) projects the label (2), sticky side down, onto the produce item (7).

In the first embodiment, the labels themselves are projected to object to be labeled without the pickup head (5) contacting the object. Alternatively, in a second embodiment, a
25 bellows type applicator can be utilized, instead of the projecting pickup head (5). In this case the pickup head (5) carrying the label projects toward the object to be labelled and makes contact with the object to deposit the label. As discussed further herein in a third embodiment the pickup head (5) can be constructed with a piston arrangement. The remaining features disclosed herein can be used with any pickup head arrangement,
30 including those disclosed herein.

Referring to Figure 3, the circular, elliptical, or other shaped paper label (2) is held to a siliconized backer tape (1) by an adhesive to form a continuous length of tape and is provided in roll form.

Fig. 3 shows that the backer tape (1) with labels (2) is fed in a first direction toward printer (6), through a series of rollers (3A) - (3D), to deliver the label to the turn bar assembly (10). During the feed, the label (2) is printed by the ink jet printer (6). Referring also to Figure 4, as shown at (10A) while rotating around the turnbar (10), the label (2) is first held to the curvature of the turnbar by the airstream at (10B). The label (2) is then peeled off the backer tape as it moves about the turnbar with the assistance of another airstream at (10C), that lifts the label from its backer tape (10) to apply it to the pickup head (5). The pickup head (5) applies suction to draw label (2) toward the distal end of the pickup head (5). At this point, the linear speeds of the label and the rotating pickup head (5) are the same. The transfer is made as the label is provided on to the pickup head (5).

While the label would have a tendency to delaminate at the first turn of the turn bar (10A), it is held to the backing tape and the shape of the turn bar (10) by way of the force of air streams discussed above, which are supplied by strategically placed air jets. These air jets force the label to turn with the backing. In one possible configuration, as seen in Fig. 4, a first air jet 10A directs air from a 3 o'clock position, a second air jet 10B directs air from a 6 o'clock position, and a third air jet 10C directs air from an 11 o'clock position. These air streams are used to turn the label and force dry the ink applied simultaneously to the label. The drying function allows the labels to be printed and applied at a high speed rate. The print and apply rate, for example, is 10/sec. Airstream (10A) turns the label on a cushion of air (10B), and it also provides a forced drying of the printed ink. Airstream (10C) pushes the label to pickup head (5), as best seen in Fig. 3.

Air streams are produced by a number of jets. In another configuration, each air stream is produced by 3 jets, one set of jets being approximately spaced so as to provide air directed perpendicular to the label at the 3 o'clock position and another 3 jets similarly spaced and directed toward the tape at the 6 o'clock position, (90 degrees apart). This configuration is shown in Fig. 4. The air source can be precisely controlled by pressure and flow regulation. The air pressure output by these air jets are preferably in the 10- 20 psi range, and low air pressure is all that is needed to dry the ink and to push the labels in the proper direction.

Referring now to Figure 5, the print and apply operation is a real time operation that occurs "just in time", i.e., the label is printed and applied at roughly the same time. As shown in Figure 5, the pickup head (5) makes contact with the label (2) before it is

completely printed by printer (6). Alternatively, the label (2) can be completely printed before making contact with pickup head (5).

The apparatus is also equipped with a sensor (135) which detects position encoder markings on the side of the backer tape facing the printer (6). As shown in detail in Figs. 5 6A and 6B, the backer tape preferably has a small key punch slot (92) between each of the labels (2). A transmitted portion (137) of the sensor (135) transmits an optical signal which, when registered with the key punch slot, is reflected back to a collector portion (139) of the sensor (135). The reflector could be a reflective object (143) located behind the backer tape. Alternatively key punch slot (92) could be replaced by a reflective portion on 10 the backer tape itself, eliminating the need for reflective object (143). The sensor (135) thus provides essential information concerning the precise position of the label (2) as it passes the printer (6) and proceeds to the applicator head (4). The use of a reflector rather than an optical receiver allows the entire sensor to be located facing on the side of the backer tape to be printed. This facilitates replacement of the feeder roll (141) and does not 15 make it necessary for having such electrical connections, since it is not necessary to align optical receiver on the feeder roll with an optical signal transmitter.

Referring back to Figures 1 and 2, the speed of the circumference of the label wheel on which the backer tape (1) mounts is coordinated with the linear speed of the conveyor (8). In the example, the pickup heads (5) rotate in a counterclockwise direction. Location 20 (70) of the pickup head (5) is the location at which the label is printed. After label printing, pickup head (5) rotates counterclockwise, moving through the positions (72), (74) and (76). The label is applied to the produce, fruit or other object (7) at the 6 o'clock position (see Figure 2). The pickup head (5) follows the object (7) to make sure that the label (2) is applied firmly onto the surface of the object. Since the printing is done while the backer 25 tape is moving, the printer must take into consideration the acceleration of the backer tape, and adjust the printing to provide a uniform printing on the label.

The label (2) is pulled off the backer tape as previously discussed at the 12 o'clock position. A vacuum or suction applied through holes (9) in the distal end of pickup head (5) holds the label (2) with the sticky side up to the label head and it maintains the suction 30 position until it rotates all the way to location (76). Label printing occurs at the 12 o'clock position. The labels are on the reel and then pulled off at this location. The printing and pulling off occurs at virtually the same time. Printing occurs on one side of the label. The

vacuum holds the label onto the pickup heads. As the label rotates to the 6 o'clock position, the sticky side faces down, and is placed on the object (7).

Figure 7 illustrates a pickup head assembly that may be utilized according to a third embodiment of the invention. The pickup head has a cylinder body (30), typically made of aluminum, cylinder (30) may be equipped with a liner (31) therein, such as a brass liner. Main piston (32), made for example of Delrin, fits within the cylinder or cylinder liner. Main piston (32) has vacuum ports (33) built into it which connect to a hollow interior portion of the main piston. At the lower portion of main piston (32) is a smaller firing piston (34). Main piston (32) is connected to a stop (35), for example of molybdenum-filled nylon, which restricts its motion. A retaining ring (36) and an applicator (37) are located at the distal end of the pickup head (5A).

Applicator (37) is formed of a material such as silicon rubber or the like, and has a one or more holes (9A) located at a top portion thereof (that portion on which the label is placed) to supply the suction to hold the label (2) on the pickup head (5A) as it is transported before being deposited on the object (7).

As discussed further herein, holes (9A) in applicator (37) hold the label (2) on the pickup head (5A) as a result of the vacuum applied through the vacuum ports (33). This vacuum also retracts the pickup head (5A) from its extended position after the label (2) is deposited on the object (7). Also as further discussed herein, the firing piston (34) is triggered by a burst of air or other pressure source to initiate outward movement of the main piston (32). As a result of its momentum, main piston (32) continues its outward motion to allow applicator (37) on the distal end to deposit a label (2) on object (7). The applicator (37), as shown in Figure 7, can be formed with one or more sculptings (38) which allow it to tilt and move in directions other than the direction of outward movement of the main piston (32). This allows the applicator (37) to effectively apply labels to objects which are not flat. Alternatively, applicator (37) can be formed using a foam material or other material that does not damage the object being labelled.

Figure 8A generally illustrates a rotary applicator head (4) with eight pickup heads (5A) according to the third embodiment of the invention. The rotary applicator head (4) can be formed to accommodate any desired number of pickup heads. Figure 8A also shows a label (2) held in place on pickup head (5A) by vacuum provided to the label (2) by way of holes (9A) at the distal end of pickup head (5A), Figure 8B shows an outer housing of the rotary applicator head (4), which has a pressure supply (21) to supply a vacuum to each of

the pickup heads (5A) when they are in the 6 o'clock position, and which also has a vacuum opening (20) to supply a vacuum to the pick-up heads at other positions. As discussed further herein, the vacuum ports (33) in the pickup head use the vacuum supplied through vacuum opening (20) from vacuum source (20A) to allow the pickup head (5A) to suction the label (2) through holes (9A) and hold it on the distal end of pickup head (5A) as the label peels off the backer tape (1). Figure 8A shows a label (2) held, by vacuum, to the applicator (33) of pickup head (5A) through holes (9A).

As shown in Figure 8B, the vacuum supply is provided to the pickup heads by way of opening (20) on the applicator head (4). By way of illustration and not limitation, opening (20) is shown extending from about the 5 o'clock position to about the 7 o'clock position. The exact locations of the start and end positions of the opening (20) can vary. The requirement is only that the vacuum be supplied to the pickup heads (5A) continuously until just prior to application of a label onto an object, (e.g., the 7 o'clock position). The vacuum is removed and not provided again until just after the label has been applied (e.g., the 5 o'clock position). Alternatively, the vacuum may be supplied at all times except the label deposit position (e.g., 6 o'clock position). In yet another alternative, the vacuum may be supplied at all times, including the label deposit position if the air pressure supplied by pressure source (21A) through pressure line (21) overcomes the vacuum supplied by the opening (20) when the pickup head is at the label deposit position. The vacuum is supplied to the pickup heads (5A) by way of vacuum ports (45), which are positioned on the body (47) so as to allow the vacuum from the opening (20) to be received by the pickup heads (5A).

The pressure line (21) lines up with the pressure ports (44) on the body (47) (see also Figure 8A), such that a pickup head (5A) at the label deposit position receives air pressure by way of the pressure line (21) and port (44). The air pressure is received at the firing piston (34) that is positioned adjacent to the port (44) when the pickup head (5A) is in its fully retracted position. The air pressure causes the firing piston (34) to fire. This in turn causes the piston (32) to move in a downwards direction, causing the applicator (33) to contact the object on the conveyor (positioned below the label applying apparatus) when the pickup head (5A) is in the fully extended position, as shown in Figure 10. Hole (77) in Figure 8B lines up with hole (76) in Figure 8A. These holes are used to hold an axle or other similar type of device (not shown) for rotating body (47).

As shown in Figure 9, when the pickup head (5A) has moved to a position where the sticky side of the label (2) faces the object (7) to be labelled, the vacuum is no longer supplied and pressure line (21) supplies a burst of air pressure. As discussed herein, the object is in position for labelling in this configuration at the six o'clock position. Those of ordinary skill will recognize that a system can be configured where the label is applied at a desired position, and not necessarily the 6 o'clock position.

The burst of air pressure at the labelling position causes the firing piston (34) in the small bore to begin to drive the pickup head (5A) outward toward the object to be labelled. The air pressure port (22) formed in applicator head (4) directs the air pressure toward the bottom of the small bore. A small bore is advantageous because it allows for fast response, an important consideration in labelling products on a line. The air burst generates sufficient momentum in the main piston in the pickup head to move the distal end of the applicator (37) outward toward the object (7). In this way, the label (2) is deposited on the object (7) when its sticky side faces the object. After the label (2) is deposited on object (7), the vacuum port is again activated by way of rotation of the applicator head (4) to retract the pickup head (5A). Figure 9 illustrates the pickup head (5A) in a partially extended position, after just receiving the air pressure from the air supply (21). Figure 10 illustrates the pickup head (5A) in the fully extended position, to effect labelling. The time between the partially extended position, as shown in Figure 9, and the fully extended position, as shown in Figure 10, is very short, for example, in the microsecond or millisecond range.

Figure 11 illustrates the action taking place just after the label is deposited on the object. As Figure 11 shows, after the pickup head (5A) deposits the label, it rotates out of position and the vacuum is again applied. At this time the vacuum acts to retract the main piston (32). The vacuum is constantly applied when the pickup head is out of the labelling position and is used later, for example at the 12 o'clock position, to pickup and hold another label on the applicator (37). As one of ordinary skill in the art will recognize, the vacuum ports and pressure supply can be switched or can be continuously supplied. For example, where the vacuum and pressure supplies are continuous, the pressure is always supplied as the pickup head passes the labelling position and the vacuum is always applied at the remaining positions. In this case, each pickup head advances outward and retracts at the same positions regardless of whether or not a label is being deposited. Alternatively, the system could be configured with switches operating synchronously with the labels to supply the air pressure only at times when a label is being applied. In this case, the pickup head

would remain retracted as it passes the labelling position if no label is being applied, for example when no object is passing the labelling position.

The present invention allows the use of a low speed, high torque motor (which allows starting and stopping at a fast rate). The labels can be picked up and applied at a rate of 10/sec, printed at the rate of 10/sec, and dried at the rate of 10/sec. The very high acceleration rates required to transport a label to the printer and change the speed rapidly to pass it to an applicator head are achieved by using a stepper motor. The stepper motor operates in "open loop" configuration with feedback coming from sensors monitoring the position of product and label. This allows continuous monitoring of the presence and position of both the product and the label. The feedback is normally delivered by shaft encoders in a "closed loop" system as is known to those of ordinary skill. Ink-jet printers are used for high speed non-contact printing.

The labeler according to the invention provides a cost effective method of applying PLU codes to objects, including fruit and vegetables at packing plants. The printer prints and applies the correct label showing the product and the grade (the number of grades that can be printed is unlimited) on one label from stock.

The stepper motor delivers the label at high rates of speed (such as at 10/sec). The motors and sophisticated micro-stepping abilities of drivers (which give step number and direction of movement) are used to produce a high performance, low-cost label feed system. The labeling machine may be controlled by software. The control by software uses a technique known as electronic gearing, and operates like meshed gears, where the movement of a slave axis is directly related to the movement of a master axis and may be used to control operation of the labeller herein. Preferably, a single axis controller is used. Using a single axis controller allows the expansion of the number of lanes controlled by adding a controller card per lane. This allows for any number of lanes to be controlled each with its own dedicated controller card.

An algorithm can be used to achieve synchronization in the apparatus. The motors run in a closed loop condition. As the label tape is advanced at such a high acceleration and deceleration rate, slippage can occur. To control the tape slippage, position sensing takes place at the tape using the optical sensor previously discussed herein rather than the conventional method of using an encoder on the motor shaft. This is accomplished by providing a hole punch between the labels and to read that slot position by way of an optical switch. Provision is made, not only to read that position, but to correct it when it is falling

behind. There is some chance that the label position could also get advanced. A software routine is used to correct the position either by increasing or decreasing the advancing of the backer tape until the slot position is within an acceptable window. This window is controllable along with many other parameters in a set up mode. Thus, the labelling apparatus according to the invention can be used to label, for example, a large grapefruit or small tangerine oranges, or pop cans, simultaneously at the rate of 10/sec.

Figure 12 illustrates a block diagram of a system in which a labeller according to the invention can be employed. Singulator (101) provides singulated items, such as fruit, to an optional rotator (109). The fruit or other item is then rotated as it passes through optical sensor (111). Optical sensor (111) may be a camera or other device which samples various parameters relating to grades of the item being graded. Processor (107) receives grading information from the optical sensor (111) which can be used by the labeller (113). For example, the processor (107) may store in a memory information concerning the grading of a particular item. It may then transmit that information to the labeller. Because labeller (113) prints the label as it is being applied, it is possible to print labels identifying different grades of the item. For example, when an item is graded into a certain category, its position is tracked through the system. When that particular item reaches the labeller, the processor (107) recognizes it and transmits to the labeller (113) instructions to put the appropriate label on the item. If the item is a premium grade, the labeller will print a premium grade label. If, on the other hand, the item is only a standard grade, the labeller will print a standard grade label. Those of ordinary skill will recognize that this technique can be used to identify any number of grades depending on the desired grading criteria. A feature of the invention is the ability of the labeller to print the label as the graded item passes by. In this way, different grades of items can be labelled simultaneously. A similar approach can be employed to label items based on weight, color, or any other desired parameter. Thus, the remaining elements of Fig. 12; such as weigh scale (115) can be used before the labelling takes place. Fig. 12 illustrates the use of drop stations (119) where items can be deposited after labelling.

To summarize, according to the invention, the label is turned on a tight curve and kept on the backer tape by a controlled air cushion, the ink is dried with the same air which keeps the label in place, the label is removed by peeling it off by air, the applying and printing of the label is done almost simultaneously, and the printing labeller has multiple applicator heads.

It should be noted that the applicator at the distal end of the any pickup head embodiment could also be a sponge applicator or any other material which would allow a vacuum applied to the pickup head to hold the label thereon. Alternatively, the entire applicator head can be a sponge-like device, where each pickup head corresponds to a perforation in the sponge-like device, with small holes at the top of each of the perforations. Referring now to Figures 13A and 13B, the sponge applicator 1300, which corresponds to a passive applicator, and which could be made out of urethane foam, so that it springs back quickly after it makes contact with an object, such as a fruit that has just been labeled. Figure 13A shows the sponge applicator 1300 with six applying areas 1310, 1320, 1330, 1340, 1350, and 1360, with each area corresponding to an area where a label can be placed. As each labeled is placed onto one of the six applying areas of the sponger applicator 1300, such as at the 12 o'clock position, a vacuum is applied to maintain the label on the sponge applicator. Such a vacuum applying device could be the device shown as elements 20 and 20A in Figure 8B, and the vacuum would be applied from the 7 o'clock position to the 5 o'clock position. Unlike the third embodiment, however, the sponge applicator embodiment does not use an air pressure source at the 6 o'clock position, since the sponge applicator 1300 is sized so that the labels at the 6 o'clock position impinge on objects that are moving on a conveyor positioned below the sponge applicator 1300. Once a label is provided onto an object at the 6 o'clock position, the vacuum is reapplied to set up for retrieving another label from the label applying position (e.g., the 12 o'clock position). Figure 13B shows a side view of a portion of the sponge applicator, showing air holes positioned at two different locations 1361 and 1363, with those two locations corresponding to any adjacent two of the six locations 1310, 1320, 1330, 1340, 1350 and 1360 shown in Figure 13A. These locations 1361 and 1363 are used to provide the vacuum to a maintain a label positioned on either or both of the locations 1361 and 1363.

While embodiments of the invention have been described herein, modification of the described embodiments may become apparent to those of ordinary skill in the art, following the teachings of the invention, without departing from the scope of the invention as set forth in the appended claims.

WE CLAIM:

1. A label applicator, comprising:
a label carrier containing a plurality of unprinted labels,
a print station including a printer, positioned to print a desired image on said unprinted labels to provide printed labels, and
a pickup head for picking up the printed labels from said print station at a label transfer position, carrying said printed labels from said label transfer position to a label deposit position, and successively placing said printed labels on said individual objects.
2. A label applicator as recited in claim 1, comprising a vacuum source
said vacuum source being activated to hold printed labels on an applicator at a distal end of said pickup head.
3. A label applicator as recited in claim 2, said pickup head being retractable by said vacuum to a position at which labels are transferred to said applicator.
4. A label apparatus recited in claim 3, said applicator having an opening herein for applying said vacuum to hold said label thereon.
5. A labeling apparatus as recited in claim 4, said pickup head having a vacuum port in a proximate end thereof, said vacuum port being in communication with said opening in said applicator, and said vacuum source.
6. A label applicator as recited in claim 5, said pickup head being extendable toward one of said individual objects at said label deposit position.
7. A label applicator as recited in claim 6, said pickup head comprising a main piston attached to said applicator and a firing piston attached to said main piston, said firing piston being smaller than said main piston.
8. An apparatus as recited in claim 7 comprising a bore of a size to accommodate said firing piston.
9. An apparatus as recited in claim 8 comprising a pressure source, said pressure source providing pressure to said small bore to fire said firing piston.

10. An apparatus as recited in claim 9, said bore being positioned at an angle to direct said pressure toward said firing piston
11. An apparatus as recited in claim 9, said firing pin being linked to said input force to said main piston upon firing of said firing piston, thereby moving said main piston.
12. An apparatus as recited in claim 11, said main piston being linked to said applicator such that after firing of said firing piston, momentum of said main piston drives said applicator toward one of said objects to deposit said label thereon.
13. An apparatus as recited in claim 12, said bore being positioned at an angle to direct said pressure toward said firing piston.
14. An apparatus as recited in claim 12, said pickup head being mounted on an applicator head to rotate from said label transfer position to said label deposit position.
15. An apparatus as recited in claim 12, said vacuum source being routed to apply vacuum to said pickup head at said label transfer position, said pressure source being routed to supply pressure to said firing pin at said label deposit position.
16. An apparatus as recited in claim 15, said vacuum source being routed to apply vacuum to said pickup head at a position between said label transfer position and said label deposit position.
17. A labelling apparatus comprising:
 - a pickup head;
 - a vacuum source applying a vacuum to said pickup head;
 - a printer, said printer printing information on a label supplied thereto while simultaneously said pickup head applies said vacuum to remove said label from a backing tape.
18. A labelling apparatus as recited in claim 17 comprising a moveable mounting, said pickup head being attached to said mounting, said moveable mounting moving said

pickup head from a label transfer position where said pickup head receives said label to a label deposit position where said pickup head deposits said label on an object.

19. A labelling apparatus as recited in claim 18, said pickup head comprising a vacuum port through which said vacuum is applied.

20. A labelling apparatus as recited in claim 19 said pickup head comprising a main piston, said main piston being moveable in a direction to apply said label to an object.

21. A labelling apparatus as recited in claim 20, said pickup head further comprising a firing piston and a firing bore.

22. A labelling apparatus as recited in claim 21, said firing piston being linked to said main piston to drive said main piston in said direction to apply said label to said object.

23. A labelling apparatus as recited in claim 22, said firing bore being connected to receive pressure from a pressure source at said label deposit position.

24. A labelling apparatus as recited in claim 18 said moveable mounting being driven to rotate said pickup head from said label transfer position to said label deposit position and back to said label transfer position.

25. A labelling apparatus comprising:
a printer and means for pulling a label from a backing tape onto an applicator while said printer simultaneously prints information on said label.

26. A labelling apparatus as recited in claim 25 comprising means for directing said applicator to deposit said label in on object.

27. A method of applying a label to an object, comprising the steps of:
removing a label from a backer while a printer prints information on said label to form a printed label; and
applying said printed label to said object.

28. A method as recited in claim 27, the step of removing said label comprising applying a vacuum to an applicator at a distal end of a pickup head as a first end of said label emerges from said printed before a second end of said label emerges from said printer.

29. A method as recited in claim 28, the step of applying said label to said object comprising, applying pressure to a firing piston linked to a main piston, to initiate motion of said main piston.

30. A method as recited in claim 29, wherein momentum of said main piston advances said main piston toward said object.

31. A label applicator as recited in claim 1, further comprising a pressure source, said pressure source at said label deposit position projecting said label from said pickup head toward said object.

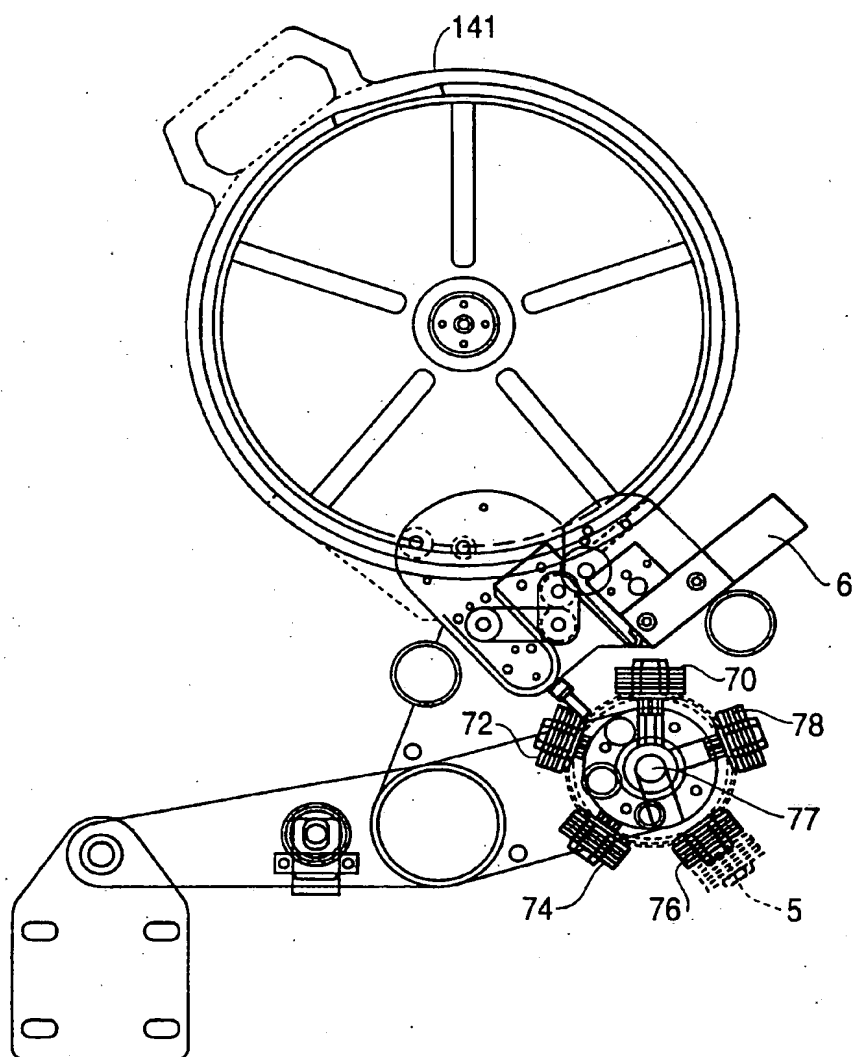
32. A label applicator as recited in claim 1, further comprising a label position indicator.

33. A label applicator as recited in claim 32, further comprising an optical sensor with a transmitter and collector, said transmitter transmitting an optical signal toward said label carrier and said collector collecting signals reflected from said label position indicator.

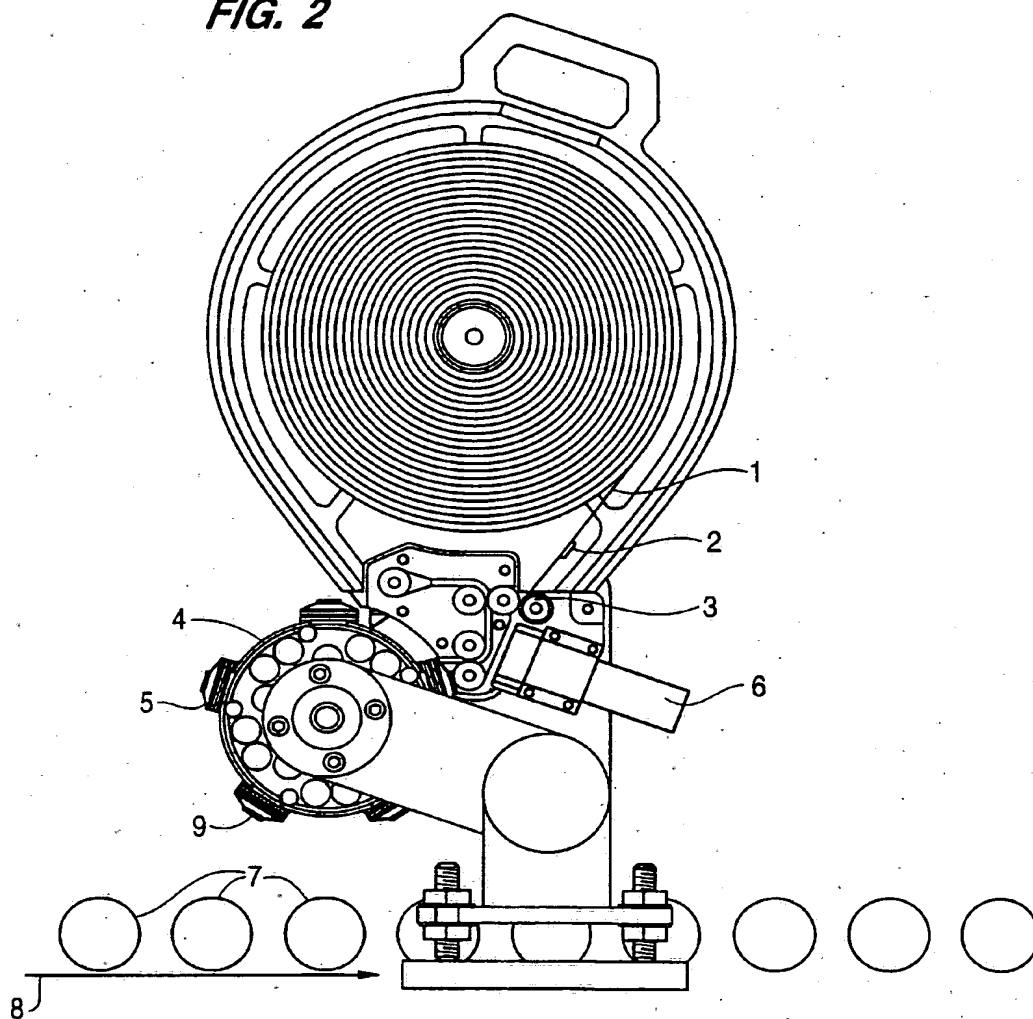
34. A label applicator as recited in claim 33, said label position indicator being one of a reflective portion on said label carrier and a reflector behind said label carrier reflecting signals transmitted through holes in said label carrier .

35. A label applicator as recited in claim 34, further comprising a processor responsive to said signals collected by said optical sensor to control a label advancing device.

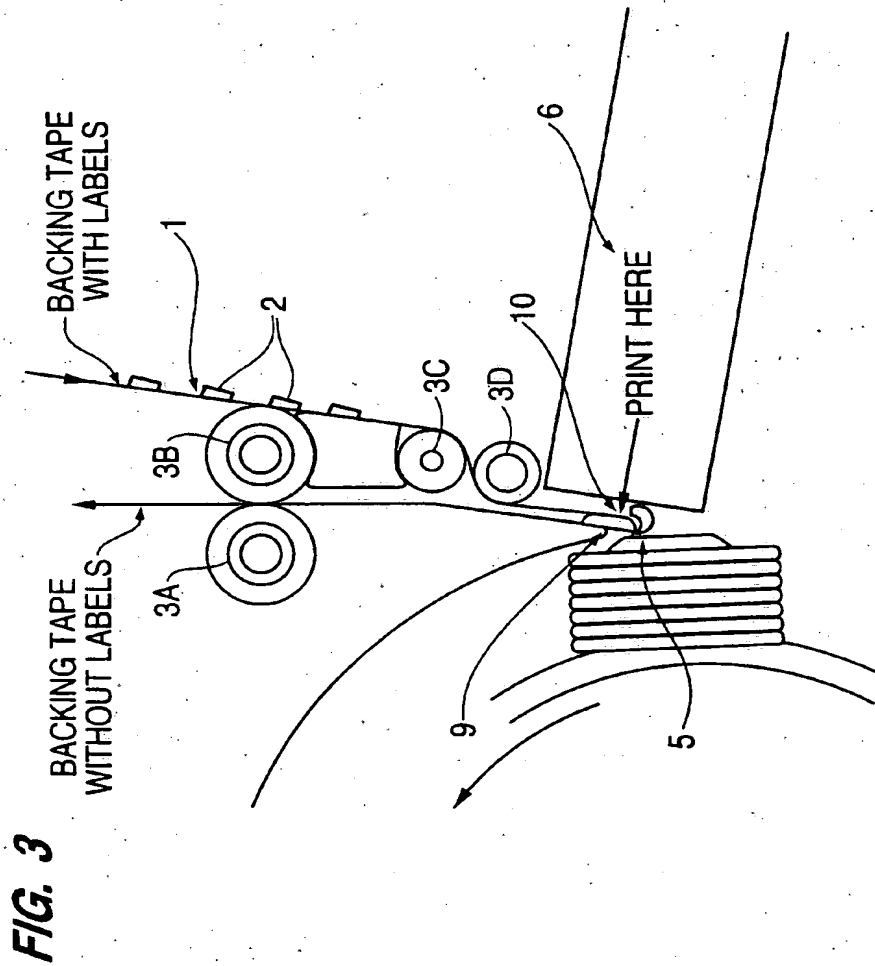
36. A label applicator as recited in claim 35, wherein said label advancing device comprises a stepper motor.

FIG. 1

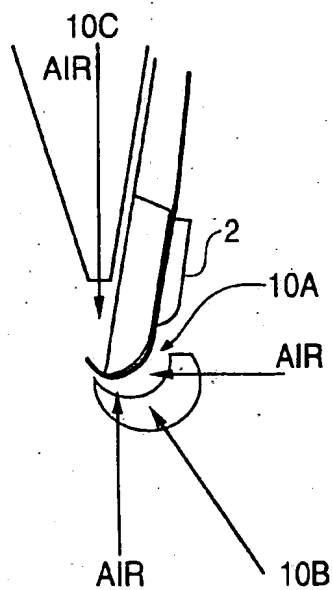
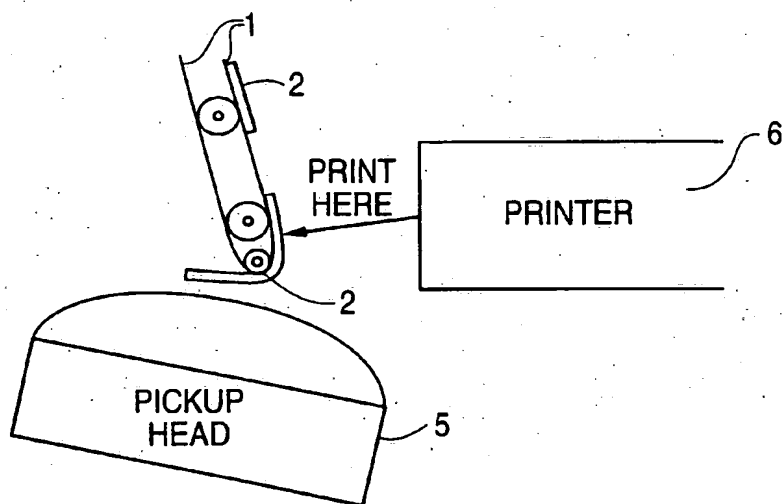
2/14

FIG. 2

SUBSTITUTE SHEET (RULE 26)

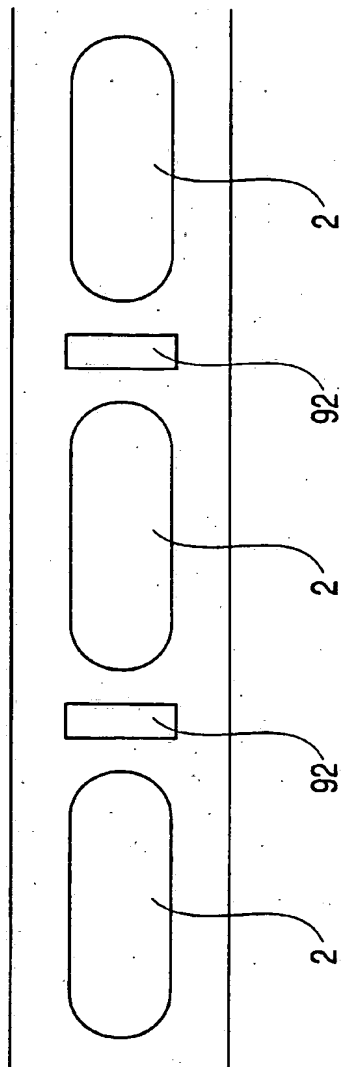


4/14

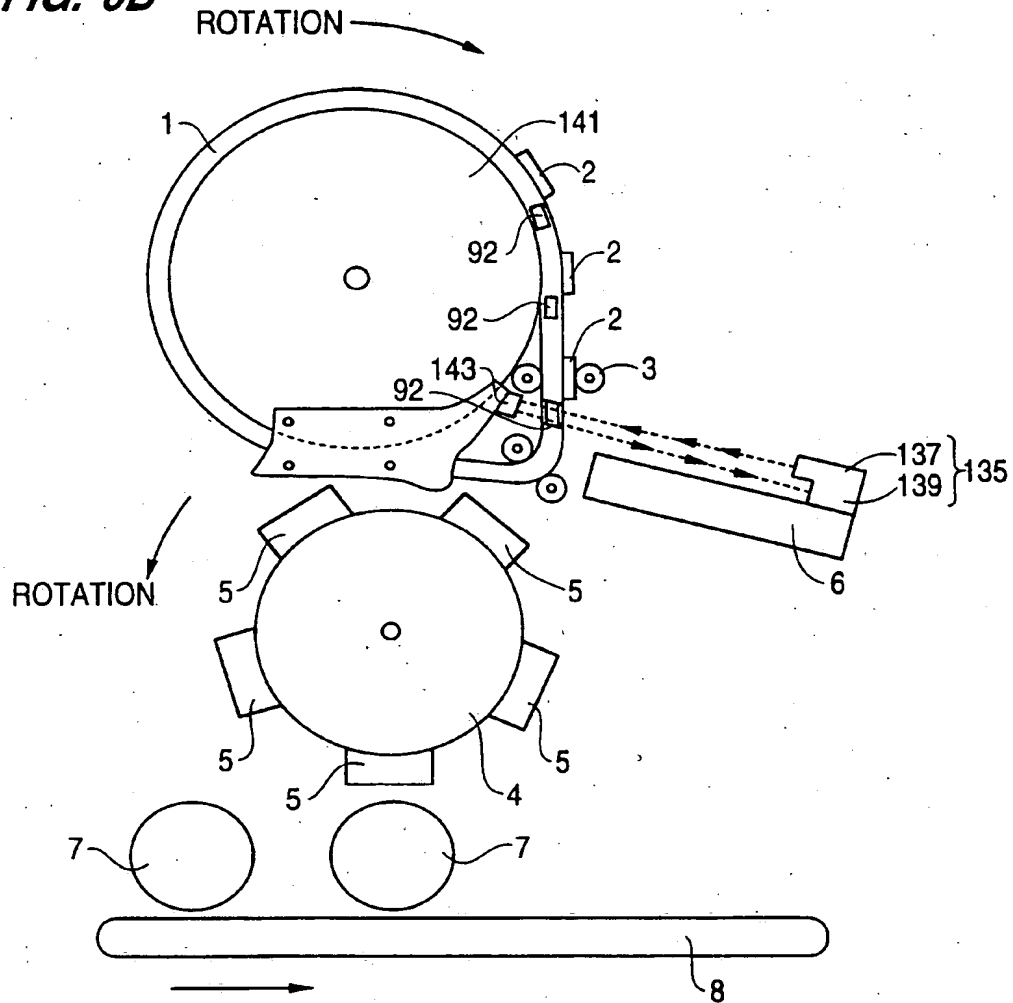
FIG. 4**FIG. 5**

5/14

FIG. 6A

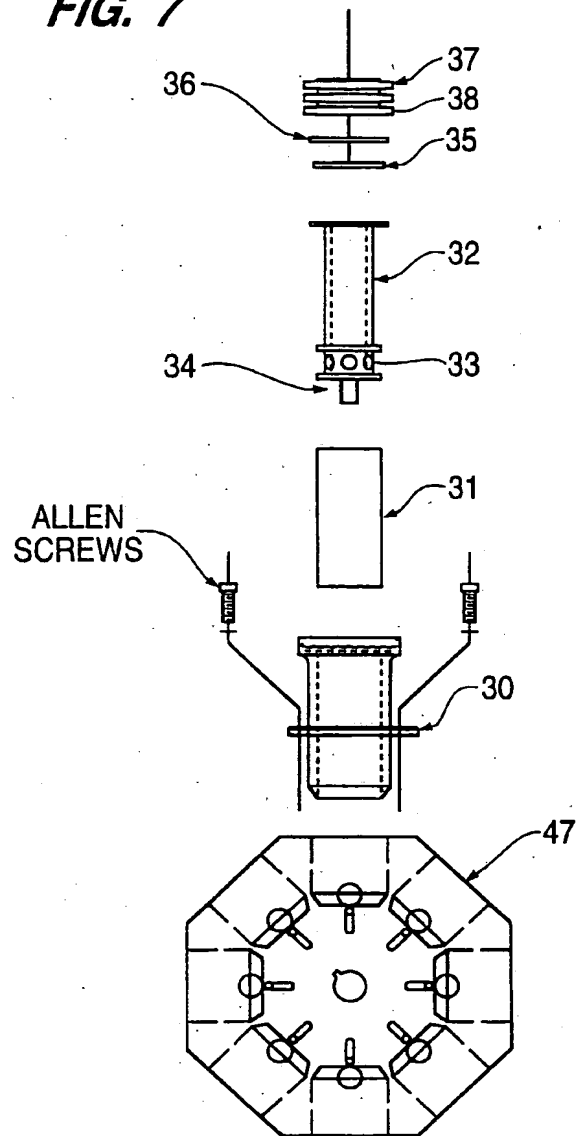


6/14

FIG. 6B

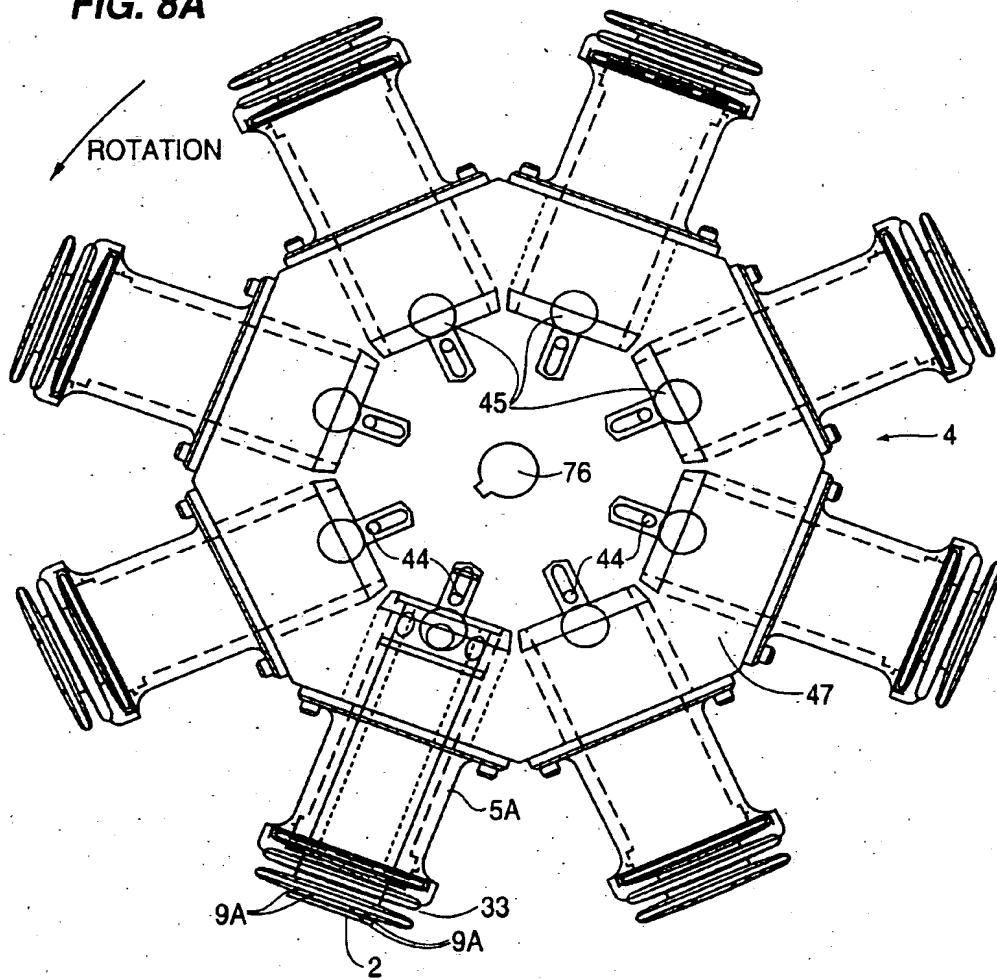
SUBSTITUTE SHEET (RULE 26)

7/14

FIG. 7

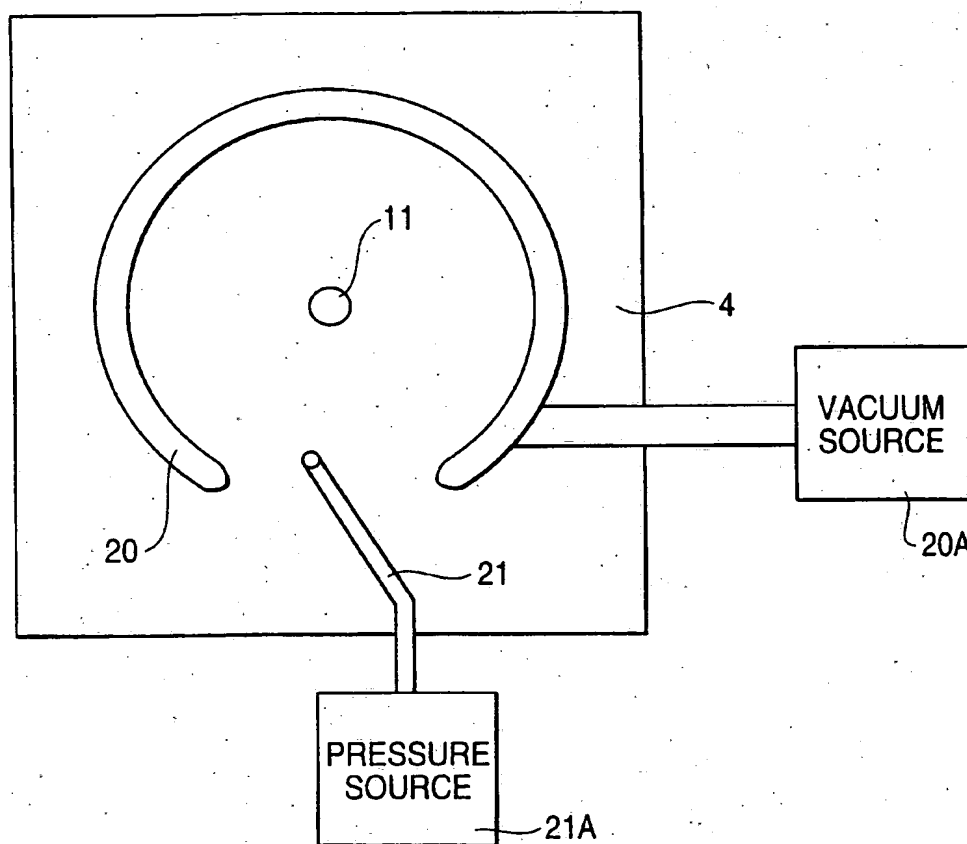
SUBSTITUTE SHEET (RULE 26)

8/14

FIG. 8A

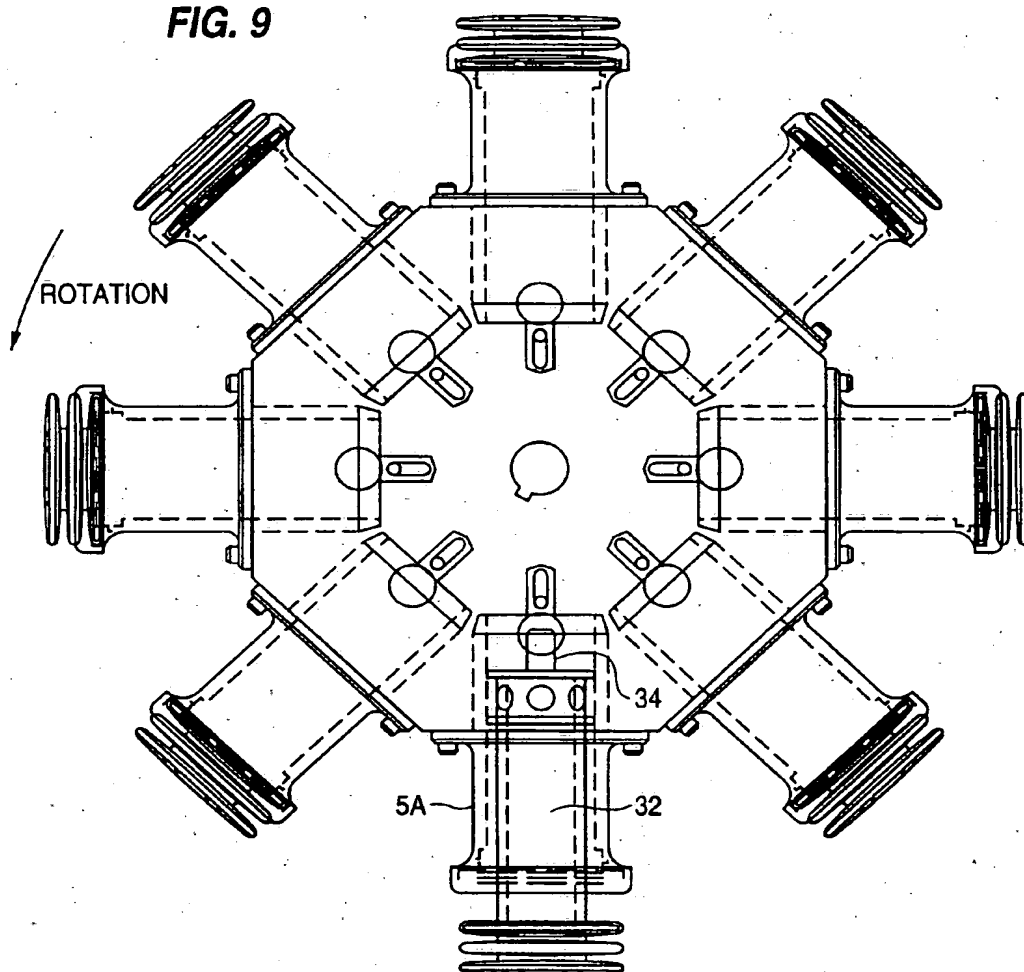
SUBSTITUTE SHEET (RULE 26)

9/14

FIG. 8B

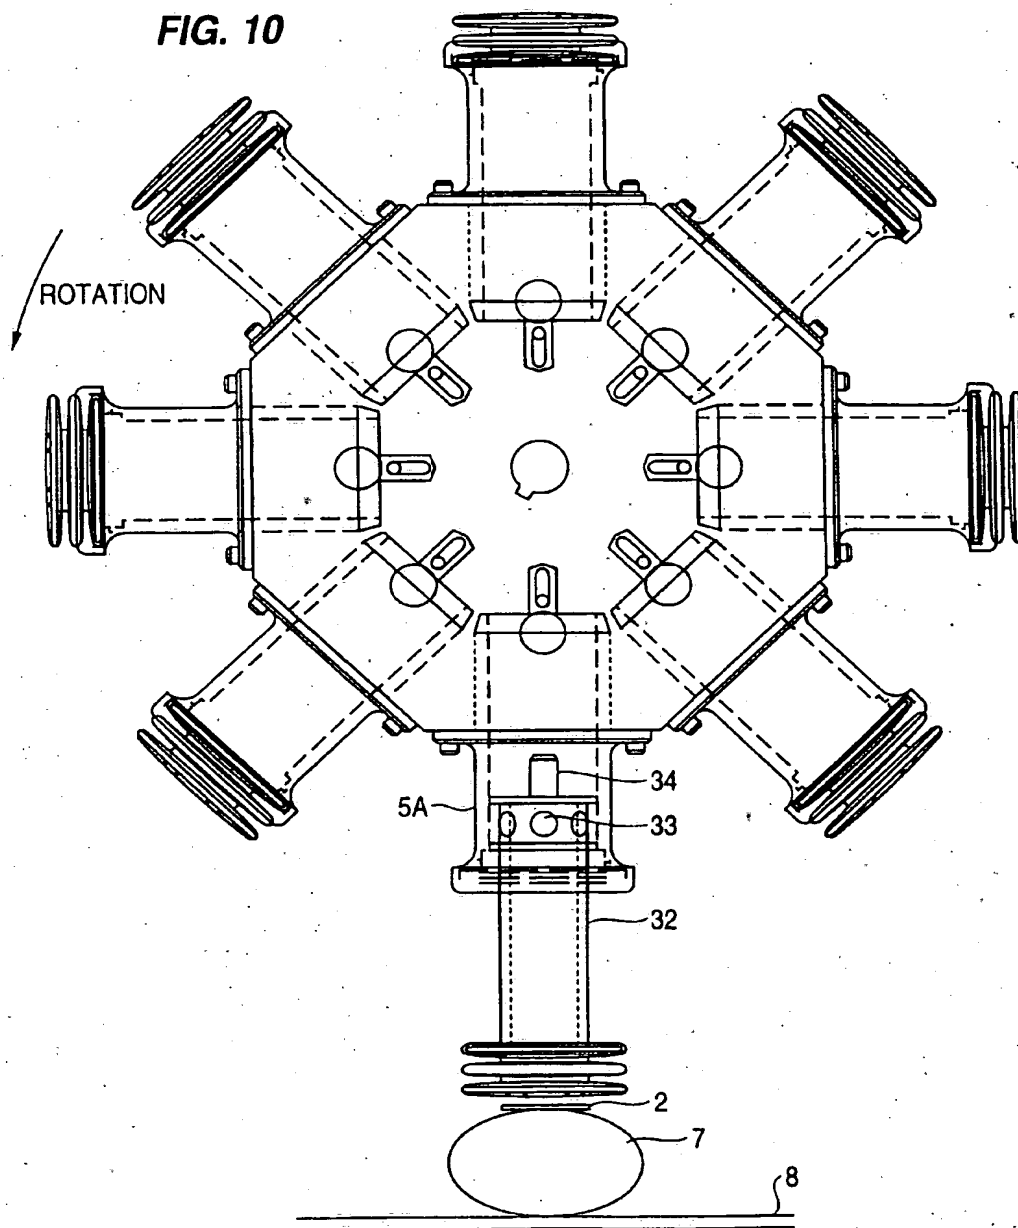
SUBSTITUTE SHEET (RULE 26)

10/14

FIG. 9

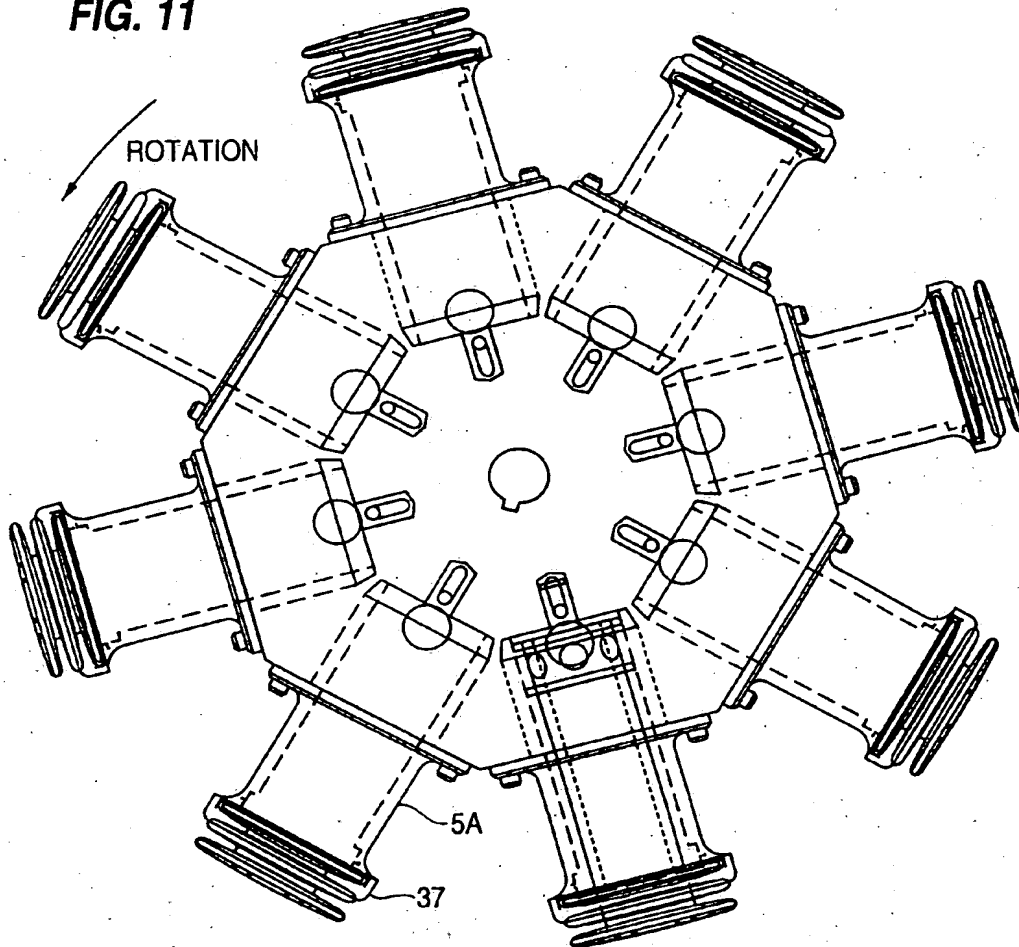
SUBSTITUTE SHEET (RULE 26)

FIG. 10

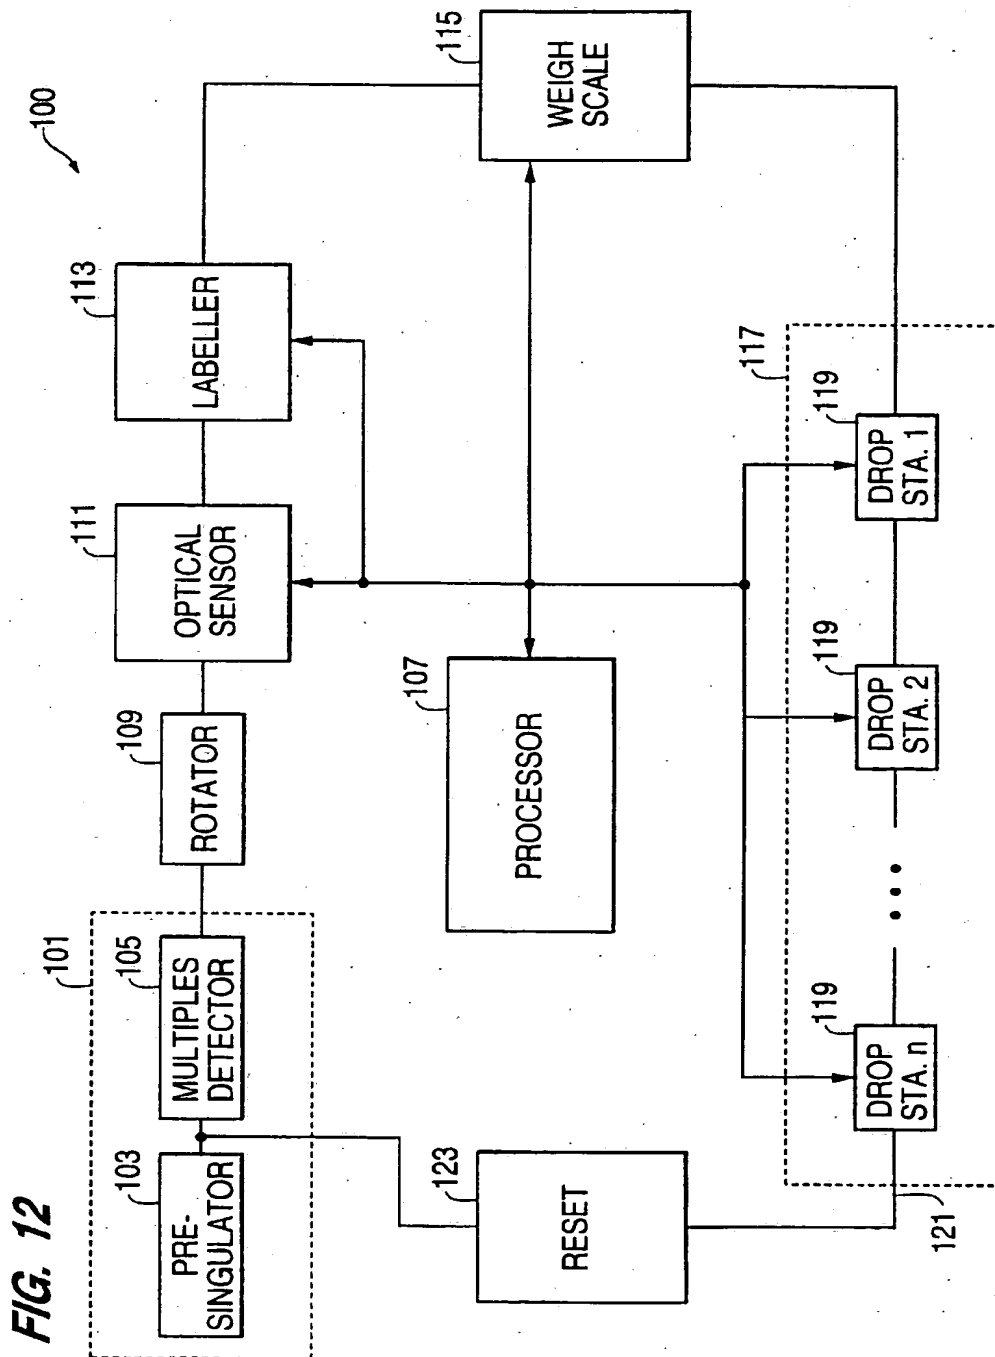


12/14

FIG. 11

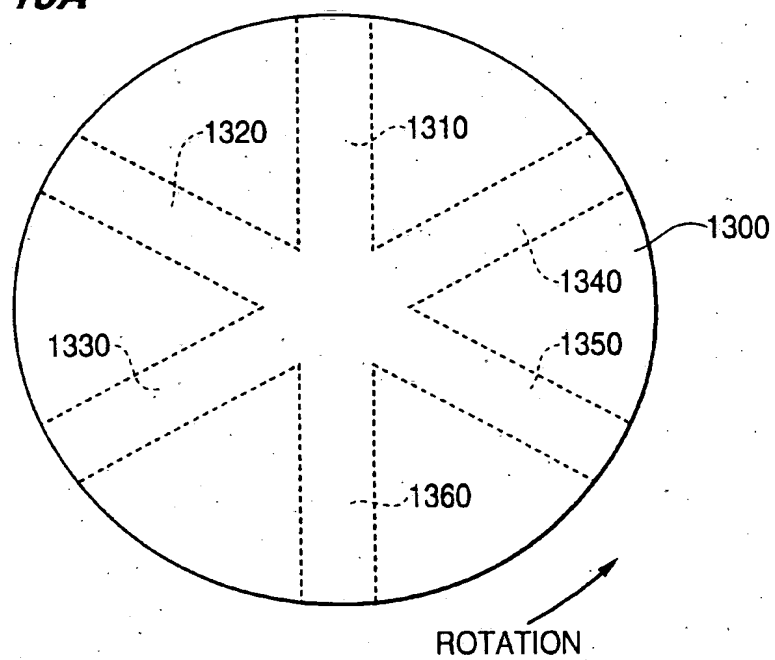
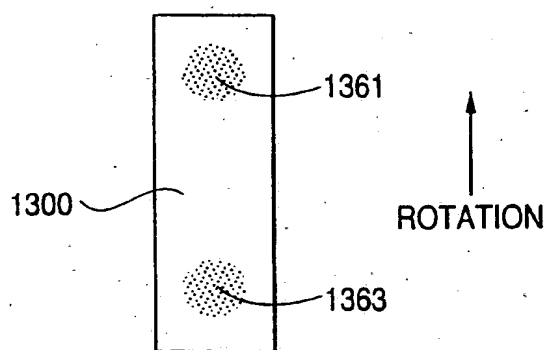


13/14



SUBSTITUTE SHEET (RULE 26)

14/14

FIG. 13A**FIG. 13B**

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 99/05142

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 B65C9/18 B65C3/00 B65C9/46		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 6 B65C		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 18 84 257 U (SCHÄFER) 5 December 1963 see page 4, paragraph 4 - page 7, paragraph 1; figure 1	1-10, 31, 32
Y		17-24, 28-30
X	FR 2 657 327 A (BIGARD ET CO.) 26 July 1991 see page 4, line 11 - page 5, line 8; figure 1	25-27
Y		17-24, 28-30
A	EP 0 113 256 A (SINCLAIR INTERNATIONAL LTD) 11 July 1984 cited in the application -/-	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "A" document member of the same patent family		
Date of the actual completion of the international search 8 June 1999		Date of mailing of the international search report 15/06/1999
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Deutsch, J.-P.

INTERNATIONAL SEARCH REPORT

Intern. Appl. No.
PCT/US 99/05142

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96 39331 A (SYSTEMATIC PACKAGING CONTROLS CORP.) 12 December 1996 -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/05142

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 1884257 U		NONE	
FR 2657327 A	26-07-1991	NONE	
EP 113256 A	11-07-1984	DE 3382825 D ZA 8309663 A	20-05-1999 29-08-1984
WO 9639331 A	12-12-1996	AU 5807996 A	24-12-1996